



844H80T6E-XY

Directed Dipole Antenna

Decibel®
Base Station Antennas

- Excellent azimuth roll-off, 15-20% reduction in cell to cell overlap
- Superior front to back ratio
- Low profile, low wind load for easy zoning
- Outstanding field record, with thousands of units deployed, world wide

ELECTRICAL

Frequency (MHz) :	806 - 896	870 - 960
Polarization :	Vertical	Vertical
Gain (dBd/dBi) :	12.2/14.3	12.5/14.6
Azimuth BW (Deg.):	80	80
Elevation BW (Deg.):	15	15
Beam Tilt (Deg.):	6	6
USLS* (dB) :	15	15
Front-To-Back Ratio* (dB) :	40	40
VSWR :	<1.5:1	<1.5:1
Max. Input Power (Watts) :	500	500
Impedance (Ohms) :	50	50
Lightning Protection :	DC Ground	DC Ground



Weight :	6.3 kg (14 lb)
Dimensions (LxWxD) :	1,219 x 165 x 203 mm (48 x 6.5 x 8 in)
Max. Wind Area :	0.10 m ² (1.1 ft ²)
Max. Wind Load (@ 100 mph) :	262.4 N (59 lbf)
Max. Wind Speed :	241 km/h (150 mph)
Hardware Material :	Galvanized Steel
Connector Type :	7-16 DIN - Female (1, Back)
Color :	Light Gray
Standard Mounting Hardware :	DB380
Standard Downtilt Mounting Hardware :	DB5083




844H80T6E-XY

Directed Dipole Antenna


Decibel®
Base Station Antennas

AZIMUTH PATTERN

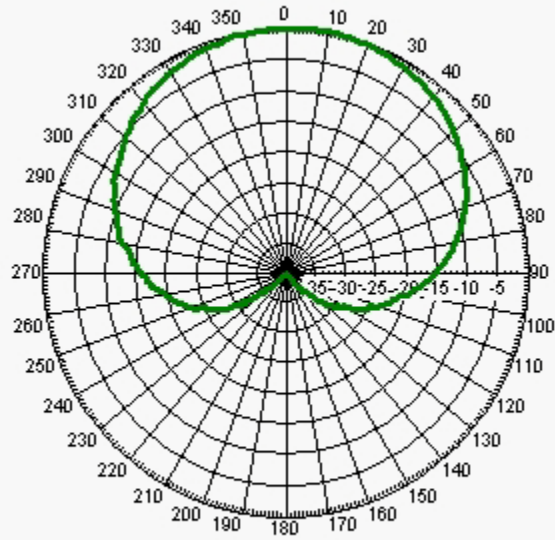

Freq: 835 MHz, Tilt: 6

ELEVATION PATTERN

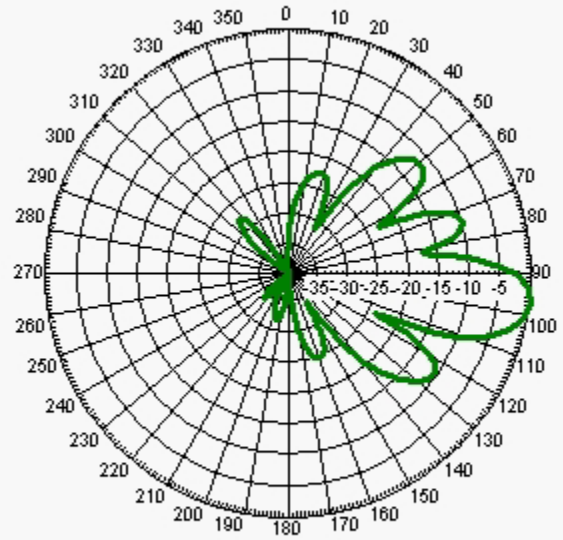

Freq: 835 MHz, Tilt: 6