



# 932DG65T6E-M

DualPol® Antenna

**Decibel®**  
Base Station Antennas

- Features air dielectric feed system for maximum array efficiency and lowest loss
- No fasteners, rivets, soldering or welding in critical element-to-transformer circuit
- Strong first upper side lobe suppression
- Excellent gain per unit length of antenna

## ELECTRICAL

Frequency (MHz) :	1850 - 1990
Polarization :	±45°
Gain (dBd/dBi) :	15.6/17.7
Azimuth BW (Deg.):	65
Elevation BW (Deg.):	7
Beam Tilt (Deg.):	6
USLS* (dB) :	16
Null Fill (dB) :	<25
Front-To-Back Ratio* (dB) :	32
Isolation (dB) :	>30
VSWR :	<1.33:1
PIM3 @ 2 x 20w (dBc) :	-150
Max. Input Power (Watts) :	250
Impedance (Ohms) :	50
Lightning Protection :	DC Ground

## MECHANICAL

Weight :	4.3 kg (9.5 lb)
Dimensions (LxWxD) :	1,295 x 178 x 76 mm (51 x 7 x 3 in)
Max. Wind Area :	0.08 m <sup>2</sup> (0.9 ft <sup>2</sup> )
Max. Wind Load (@ 100 mph) :	222.4 N (50 lbf)
Max. Wind Speed :	241 km/h (150 mph)
Hardware Material :	Galvanized Steel
Connector Type :	7-16 DIN - Female (2, Bottom)
Color :	Light Gray
Standard Mounting Hardware :	DB390
Standard Downtilt Mounting Hardware :	DB5098






# 932DG65T6E-M

DualPol® Antenna


**Decibel®**  
Base Station Antennas

## AZIMUTH PATTERN

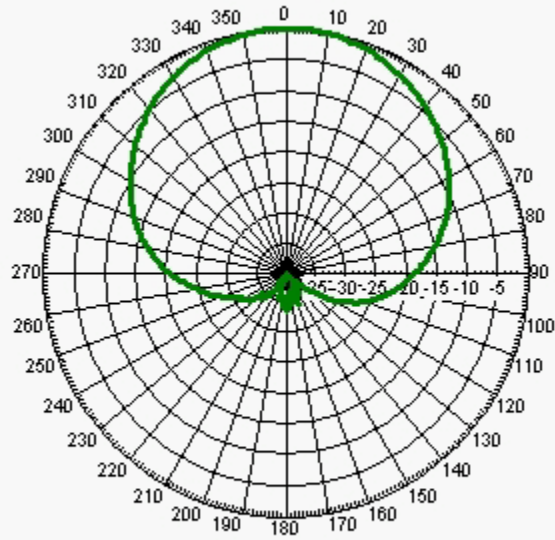

Freq: 1950 MHz, Tilt: 6

## ELEVATION PATTERN

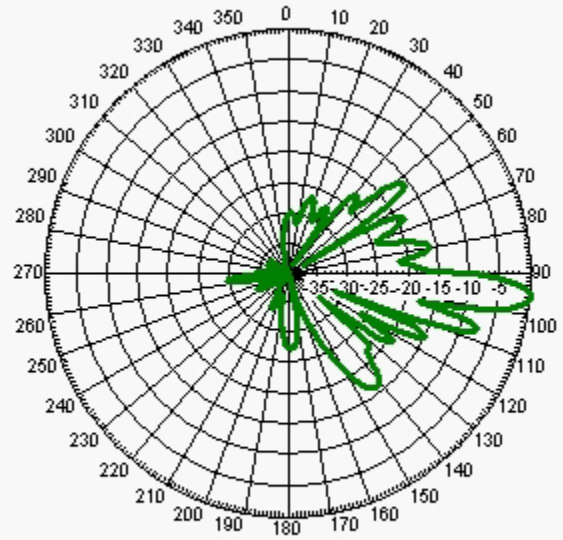

Freq: 1950 MHz, Tilt: 6