



CTSDG-06515-6DM

DualPol® Antenna

Decibel®
Base Station Antennas

- State of the art air dielectric feed system.
- No screws, fasteners, welds or solder in RF path for exceptional low PIM results.
-
-

ELECTRICAL

Frequency (MHz) :	806 - 896	870 - 960
Polarization :	±45°	±45°
Gain (dBd/dBi) :	14/16.1	14.4/16.5
Azimuth BW (Deg.):	65	65
Elevation BW (Deg.):	10.5	9
Beam Tilt (Deg.):	6	6
USLS* (dB) :	15	15
Front-To-Back Ratio* (dB) :	25	25
Isolation (dB) :	>30	>30
VSWR :	<1.3:1	<1.3:1
PIM3 @ 2 x 20w (dBc) :	-150	-150
Max. Input Power (Watts) :	500	500
Impedance (Ohms) :	50	50
Lightning Protection :	DC Ground	DC Ground



MECHANICAL

Weight :	13.8 kg (30.6 lb)
Dimensions (LxWxD) :	1,935 x 269 x 132 mm (76.2 x 10.6 x 5.2 in)
Max. Wind Area :	0.27 m ² (2.9 ft ²)
Max. Wind Load (@ 100 mph) :	711.6 N (160 lbf)
Max. Wind Speed :	241 km/h (150 mph)
Hardware Material :	Galvanized Steel
Connector Type :	7-16 DIN - Female (2, Bottom)
Color :	Off White
Standard Mounting Hardware :	600899A-2
WeatherShield™ Enclosure: (Must order separately)	AWE-A12




CTSDG-06515-6DM

DualPol® Antenna


Decibel®
Base Station Antennas

AZIMUTH PATTERN

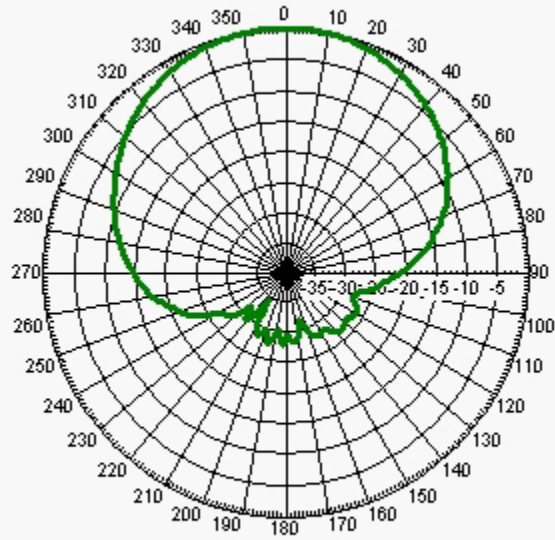

Freq: 860 MHz, Tilt: 6

ELEVATION PATTERN

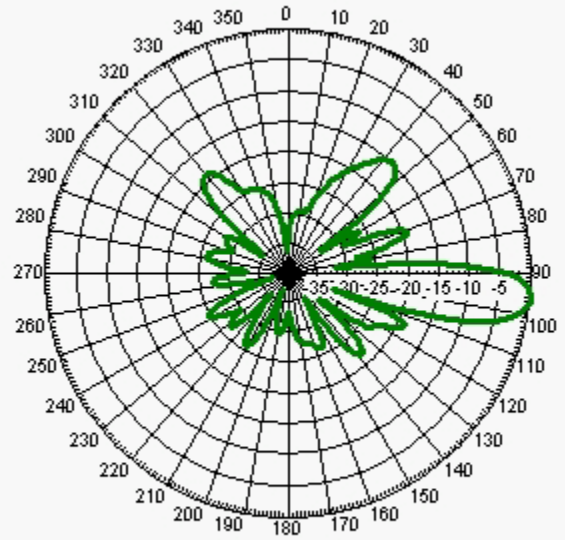

Freq: 860 MHz, Tilt: 6