



# DB842H65E-XY

Directed Dipole Antenna

**DECIBEL®**  
Base Station Antennas

- Excellent azimuth roll-off, 15-20% reduction in cell to cell overlap
- Superior front to back ratio
- Low profile, low wind load for easy zoning
- Outstanding field record, with thousands of units deployed, world wide

## ELECTRICAL

Frequency (MHz) :	806 - 896	870 - 960
Polarization :	Vertical	Vertical
Gain (dBd/dBi) :	10.5/12.6	10.7/12.8
Azimuth BW (Deg.):	65	65
Elevation BW (Deg.):	30	30
Beam Tilt (Deg.):	0	0
USLS* (dB) :	>15	>15
Front-To-Back Ratio* (dB) :	40	40
VSWR :	<1.4:1	<1.4:1
Max. Input Power (Watts) :	500	500
Impedance (Ohms) :	50	50
Lightning Protection :	DC Ground	DC Ground

## MECHANICAL

Weight :	4.5 kg (10 lb)
Dimensions (LxWxD) :	610 x 521 x 229 mm (24 x 20.5 x 9 in)
Max. Wind Area :	0.15 m <sup>2</sup> (1.6 ft <sup>2</sup> )
Max. Wind Load (@ 100 mph) :	404.7 N (91 lbf)
Max. Wind Speed :	241 km/h (150 mph)
Hardware Material :	Galvanized Steel
Connector Type :	7-16 DIN - Female (1, Back)
Color :	Light Gray
Standard Mounting Hardware :	DB380
Standard Downtilt Mounting Hardware :	DB5083






# DB842H65E-XY

Directed Dipole Antenna


**DECIBEL®**  
Base Station Antennas

## AZIMUTH PATTERN

## ELEVATION PATTERN

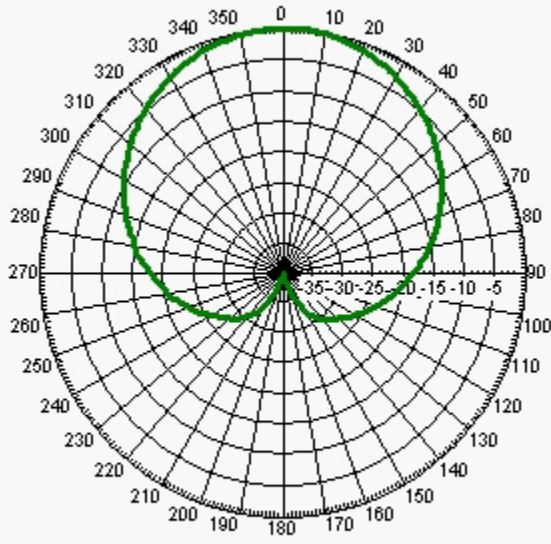

Freq: 880 MHz, Tilt: 0

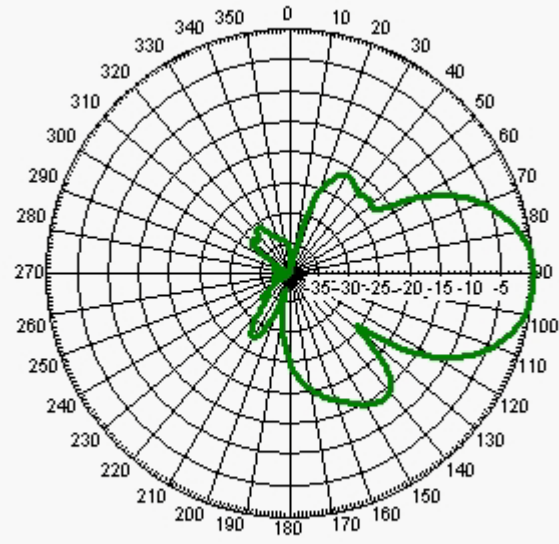

Freq: 880 MHz, Tilt: 0