



DB874G90A-XY

Panel Antenna

Decibel®
Base Station Antennas

- Air dielectric feed system featuring no screws, welds, solder or rivets in dipole feedpoint
- Low loss feed system provides improved gain per unit length
- Low noise due to superior intermodulation performance
- Low profile appearance and low wind loading profile for easier zoning approvals

ELECTRICAL

Frequency (MHz) :	806 - 896	870 - 960
Polarization :	Vertical	Vertical
Gain (dBd/dBi) :	12/14.1	12.5/14.6
Azimuth BW (Deg.):	90	90
Elevation BW (Deg.):	14	14
Beam Tilt (Deg.):	0	0
USLS* (dB) :	18	18
Front-To-Back Ratio* (dB) :	25	25
VSWR :	<1.33:1	<1.33:1
PIM3 @ 2 x 20w (dBc) :	-150	-150
Max. Input Power (Watts) :	500	500
Impedance (Ohms) :	50	50
Lightning Protection :	DC Ground	DC Ground



Weight :	6.5 kg (14.5 lb)
Dimensions (LxWxD) :	1,219 x 267 x 117 mm (48 x 10.5 x 4.6 in)
Max. Wind Area :	0.15 m ² (1.6 ft ²)
Max. Wind Load (@ 100 mph) :	382.5 N (86 lbf)
Max. Wind Speed :	241 km/h (150 mph)
Hardware Material :	Galvanized Steel
Connector Type :	7-16 DIN - Female (1, Back)
Color :	Light Gray
Standard Mounting Hardware :	DB380
Standard Downtilt Mounting Hardware :	DB5083
WeatherShield™ Enclosure: (Must order separately)	AWE-A12




DB874G90A-XY

Panel Antenna


Decibel®
Base Station Antennas

AZIMUTH PATTERN

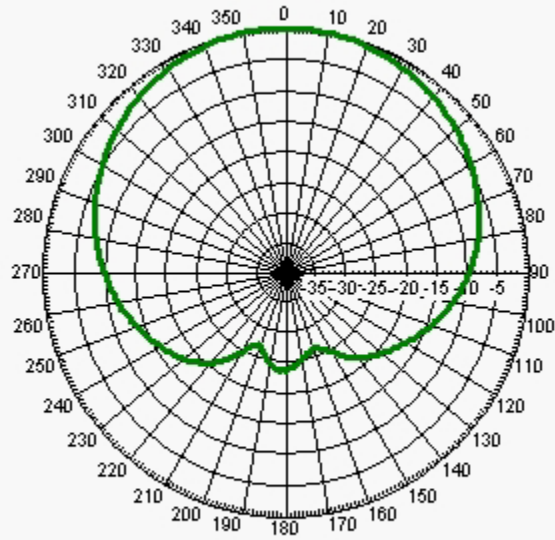

Freq: 880 MHz, Tilt: 0

ELEVATION PATTERN

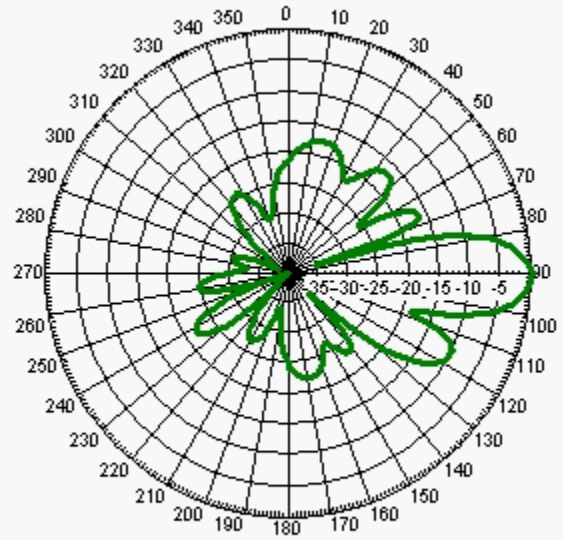

Freq: 880 MHz, Tilt: 0