



HBX-6516DS-VTM

DualPol® Antenna

DualPol®

Teletilt®

- Superior azimuth tracking and pattern symmetry.
- Features field adjustable electrical down tilt.
- Rugged, reliable design with excellent PIM suppression.
- Fully compatible with Andrew Teletilt® remote antenna control system.

ELECTRICAL

Frequency (MHz) :	1710 - 1880	1850 - 1990	1920 - 2170
Polarization :	±45°	±45°	±45°
Gain (dBd/dBi) :	15.6/17.7	15.9/18	15.9/18
Azimuth BW (Deg.):	66	65	64
Elevation BW (Deg.):	7.5	7	6.5
Beam Tilt (Deg.):	0-10	0-10	0-10
USLS* (dB) :	18	18	18
Front-To-Back Ratio* (dB) :	30	30	30
Isolation (dB) :	>30	>30	>30
VSWR :	<1.4:1	<1.4:1	<1.4:1
PIM3 @ 2 x 20w (dBc) :	-153	-153	-153
Max. Input Power (Watts) :	250	250	250
Impedance (Ohms) :	50	50	50
Lightning Protection :	DC Ground	DC Ground	DC Ground

Notes: At maximum tilt angles gain and upper side lobe suppression may be slightly reduced.

MECHANICAL

Weight :	4.4 kg (9.9 lb)
Dimensions (LxWxD) :	1,306 x 168 x 84 mm (51.4 x 6.6 x 3.3 in)
Max. Wind Area :	0.11 m ² (1.2 ft ²)
Max. Wind Load (@ 100 mph) :	298.0 N (67 lbf)
Max. Wind Speed :	241 km/h (150 mph)
Hardware Material :	Stainless Steel
Connector Type :	7-16 DIN - Female (2, Bottom)
Color :	Light Gray
Standard Mounting Hardware :	602030A



RET Ordering Information

Field Installed:	HBX-6516DS-VTM
Factory Installed, ATM200 Series:	HBX-6516DS-R2M

Andrew Corporation
 2601 Telecom Parkway
 Richardson, Texas U.S.A 75082-3521
 Tel: 214.631.0310

Fax: 214.631.4706
 Toll Free Tel: 1.800.676.5342
 Fax: 1.800.229.4706
 www.andrew.com

* - Indicates Typical
 7/2/2007
 dbtech@andrew.com

Information correct at date of issue but may be subject to change without notice.



HBX-6516DS-VTM


DualPol® Antenna

DualPol®


Teletilt®

AZIMUTH PATTERN


ELEVATION PATTERN

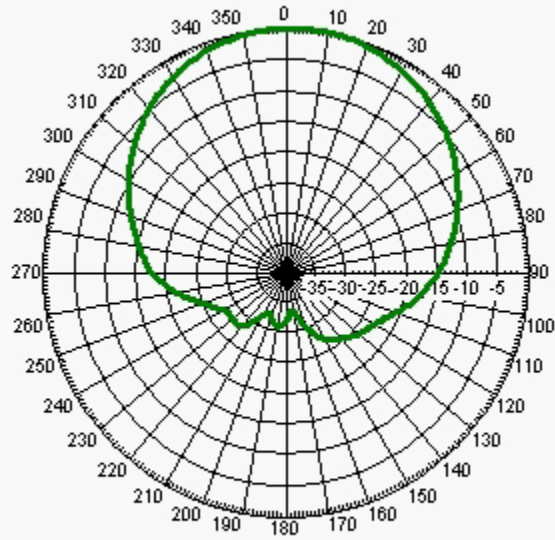


Freq: 1785 MHz, Tilt: 0

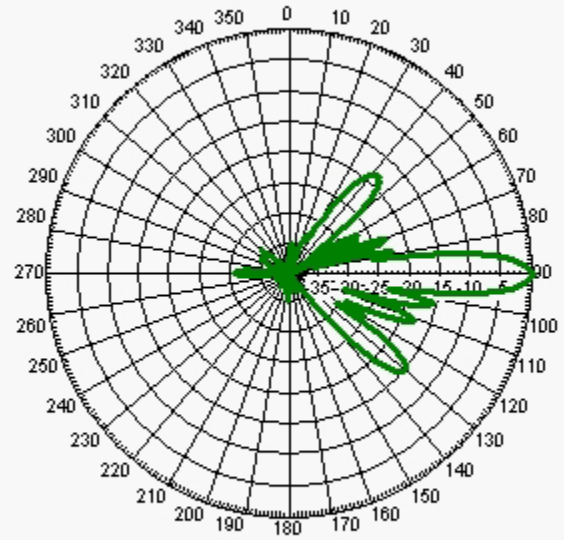

Freq: 1785 MHz, Tilt: 0

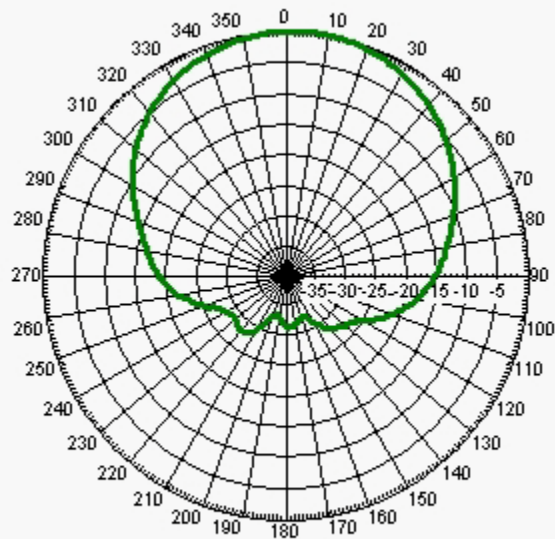

Freq: 1910 MHz, Tilt: 0

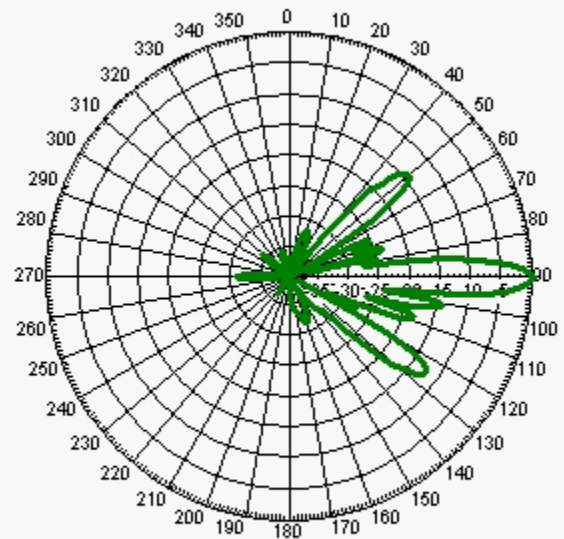

Freq: 1910 MHz, Tilt: 0




HBX-6516DS-VTM


DualPol® Antenna

DualPol®

Teletilt®

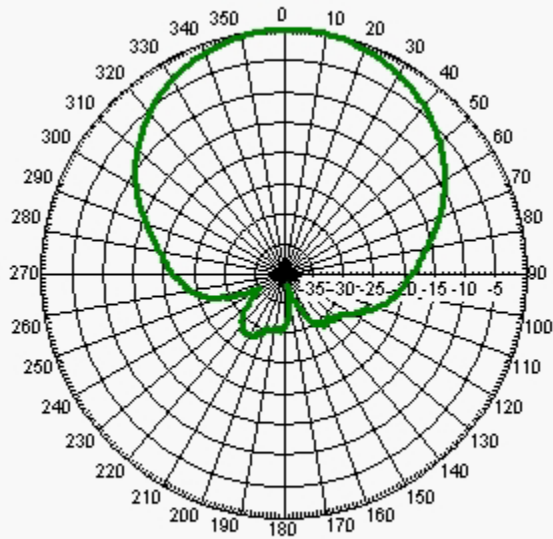

Freq: 2110 MHz, Tilt: 0

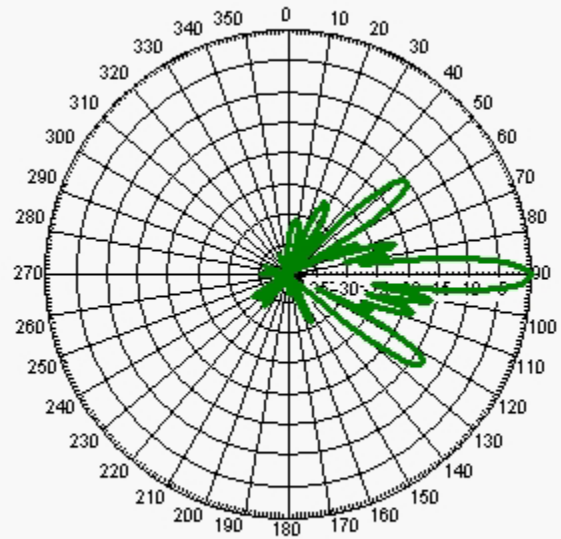

Freq: 2110 MHz, Tilt: 0