



# UMWD-03319-ODM

DualPol® Antenna

**Decibel®**  
Base Station Antennas

- Continuous wideband operation 1710 to 2180 MHz
- State of the art radiating elements
- Excellent upper side lobe suppression for interference reduction
- Rugged, reliable design with excellent PIM suppression

## ELECTRICAL

Frequency (MHz) :	1710 - 1880	1850 - 1990	1920 - 2180
Polarization :	±45°	±45°	±45°
Gain (dBd/dBi) :	18/20.1	18.3/20.4	18.5/20.6
Azimuth BW (Deg.):	35	33	32
Elevation BW (Deg.):	7	6.5	6.5
Beam Tilt (Deg.):	0	0	0
USLS* (dB) :	20	20	20
Front-To-Back Ratio* (dB) :	38	40	40
Isolation (dB) :	>30	>30	>30
VSWR :	<1.4:1	<1.4:1	<1.4:1
PIM3 @ 2 x 20w (dBc) :	-150	-150	-150
Max. Input Power (Watts) :	250	250	250
Impedance (Ohms) :	50	50	50
Lightning Protection :	DC Ground	DC Ground	DC Ground

## MECHANICAL

Weight :	13.1 kg (29 lb)
Dimensions (LxWxD) :	1,461 x 269 x 132 mm (57.5 x 10.6 x 5.2 in)
Max. Wind Area :	0.22 m <sup>2</sup> (2.4 ft <sup>2</sup> )
Max. Wind Load (@ 100 mph) :	587.1 N (132 lbf)
Max. Wind Speed :	201 km/h (125 mph)
Hardware Material :	Galvanized Steel
Connector Type :	7-16 DIN - Female (2, Bottom)
Color :	Off White
Standard Mounting Hardware :	600899A-2
WeatherShield™ Enclosure: (Must order separately)	AWE-A12






# UMWD-03319-0DM

DualPol® Antenna


**Decibel®**  
Base Station Antennas

## AZIMUTH PATTERN


## ELEVATION PATTERN

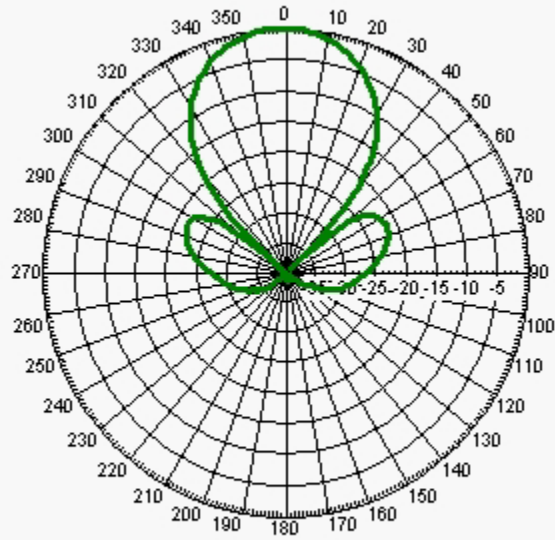


Freq: 1785 MHz, Tilt: 0

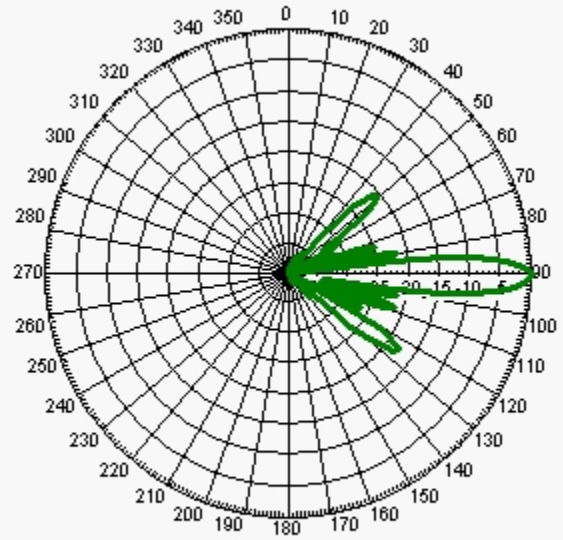

Freq: 1785 MHz, Tilt: 0

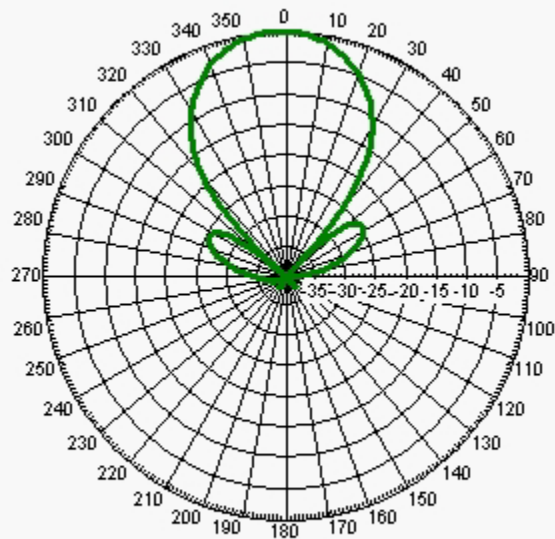

Freq: 1920 MHz, Tilt: 0

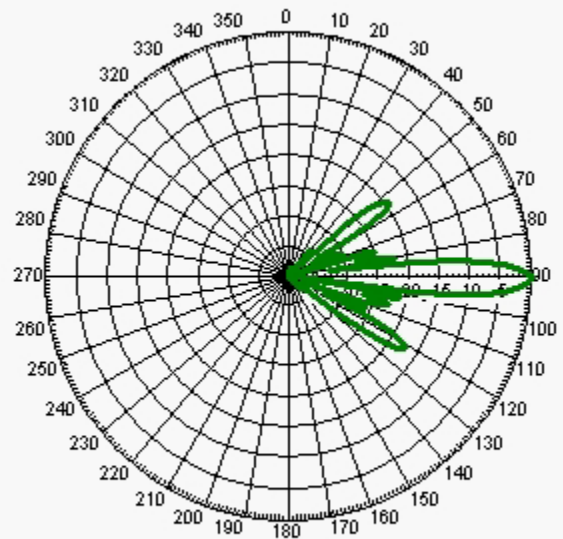


Freq: 1920 MHz, Tilt: 0




# UMWD-03319-0DM

DualPol® Antenna

**Decibel®**  
Base Station Antennas

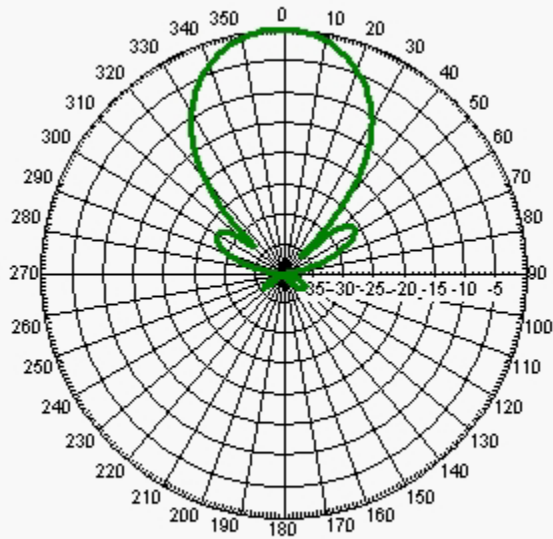

Freq: 2110 MHz, Tilt: 0

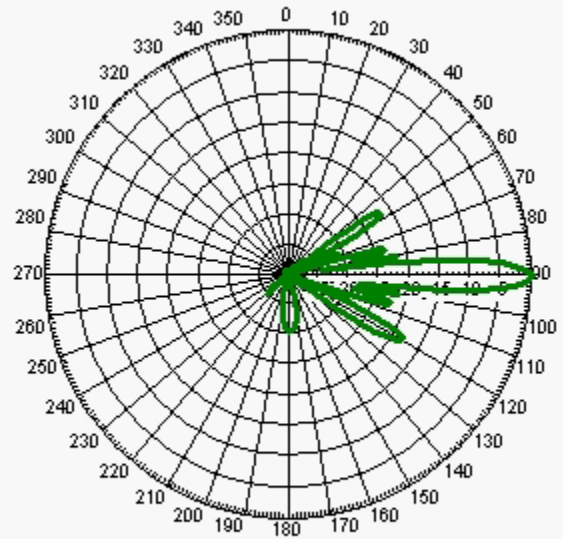

Freq: 2110 MHz, Tilt: 0