



# DB812KE-Y

Omni Antenna

**Decibel®**  
Base Station Antennas

- Omnidirectional coverage
- Rugged, durable construction, heavy duty radome for minimum tip deflection
- Lightning resistant, with large diameter conductor extending top to bottom
- Invert mountable

## ELECTRICAL

Frequency (MHz) :	890 - 960
Polarization :	Vertical
Gain (dBd/dBi) :	12/14.1
Azimuth BW (Deg.):	360
Elevation BW (Deg.):	3
Beam Tilt (Deg.):	0
VSWR :	<1.5:1
Max. Input Power (Watts) :	500
Impedance (Ohms) :	50
Lightning Protection :	DC Ground

## MECHANICAL

Weight :	29.4 kg (65 lb)
Dimensions (LxUO) :	6,807 x 76 mm (268 x 3 in)
Max. Wind Area :	0.27 m <sup>2</sup> (2.9 ft <sup>2</sup> )
Max. Wind Load (@ 100 mph) :	702.7 N (158 lbf)
Max. Wind Speed :	241 km/h (150 mph)
Hardware Material :	Galvanized Steel
Connector Type :	7-16 DIN - Female (1, Bottom)
Color :	Horizon Blue
Standard Mounting Hardware :	DB5091-3






# DB812KE-Y

Omni Antenna


**Decibel®**  
Base Station Antennas

## AZIMUTH PATTERN

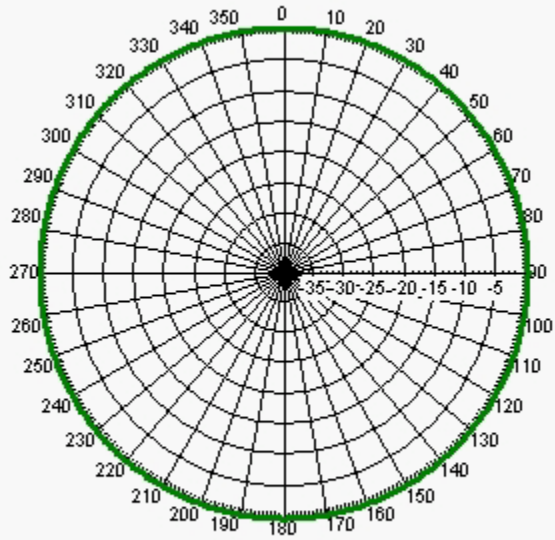

Freq: 903 MHz, Tilt: 0

## ELEVATION PATTERN

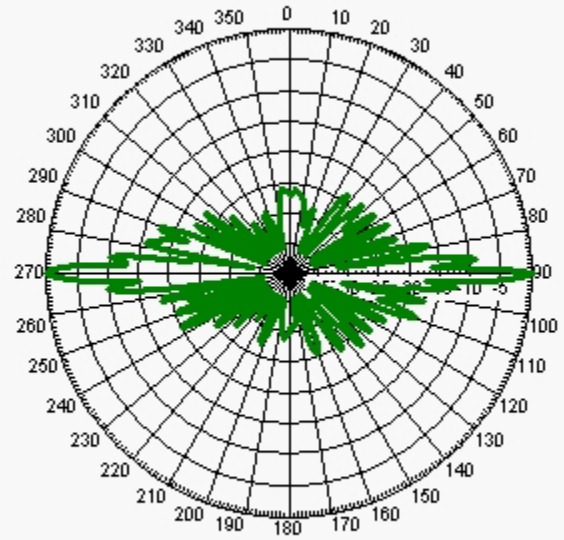

Freq: 903 MHz, Tilt: 0